

Aerohive AP350

802.11n access point



The **AP350** is a durable, enterprise-grade, high performance two radio (3x3) three spatial stream MIMO 802.11n Access Point for challenging indoor environments and provides the best range of all Aerohive APs.

AEROHIVE NETWORKS AP350 is a rugged, high performing and highly reliable 802.11n access point (AP). The AP350 provides high performance dual concurrent (2.4GHz and 5GHz) 802.11n (3x3) three spatial stream MIMO as well as dual 10/100/1000 Ethernet port service. With its extended temperature range, cast metal case and external antennas it is designed to be deployed in the most challenging of indoor environments.

The Aerohive AP350 is a durable, enterprise-grade, (3x3) MIMO solution, designed for high bandwidth demand wireless enterprise environments. With multiple radios and the ability to provide service concurrently on both 2.4GHz and 5GHz bands, the AP350 can provide up to an aggregate data rate of 450 Mbps. The AP350 provides both mesh and support for legacy 802.11a, b, and g clients, through Aerohive's industry unique and resilient controller-less architecture.

All Aerohive APs support the feature-rich HiveOS service architecture. HiveOS is an implementation of Aerohive's Cooperative Control Architecture which enables multiple APs to organize into groups or "hives," that share control information enabling functions such as fast layer-2/layer-3 roaming, cooperative RF management, security and mesh networking without requiring a dedicated system controller. The resulting feature-rich capability enables a next generation wireless LAN architecture, called a Cooperative Control Wireless LAN Architecture. This architecture provides the benefits of a controller-based implementation, yet has a lower deployment/ownership cost, is more reliable, more scalable, higher performing and more suitable for today's proliferation of wireless applications than controller-based architectures.

For product information on HiveOS, visit aerohive.com/products/software-management/hiveos
Aerohive's HiveManager NMS is a central management solution for Aerohive APs. HiveManager supports simple policy creation, firmware upgrades, configuration updates, and centralized monitoring throughout the entire Aerohive deployment, whether building-wide, campus-wide, or global—all from a single console. Because the HiveManager is not actively involved in passing traffic or in making forwarding decisions, it eliminates the traffic bottlenecks and complexities of controller-based solutions, particularly in geographically distributed environments. As a result, control is distributed, while management is centralized. Essentially, the HiveManager solution delivers the benefits of both autonomous APs and controller-based solutions, without the drawbacks of either approach.

Aerohive's HiveManager NMS can be delivered in two ways:

- HiveManager Online—a cloud-based management service from Aerohive
- HiveManager VMware virtual appliance—an on-premise VM management solution

For more information visit aerohive.com/products/software-management/hivemanager



Aerohive Networks, Inc.
330 Gibraltar Drive
Sunnyvale, California 94089 USA
phone 408.510.6100
toll-free 866.918.9918
fax 408.510.6199
www.aerohive.com

Every Aerohive Networks AP is backed by a limited lifetime hardware warranty. Extended product and technical support may be purchased separately and can include next day advanced replacement, 24x7 or 8x5 technical support, web and email support access, and software updates. For complete support terms go to www.aerohive.com/support.

Product Specifications

Radio Specifications—802.11a

- 5.150–5.950 GHz Operating Frequency
- Orthogonal Frequency Division Multiplexing (OFDM) Modulation
- Rates (Mbps): 54, 48, 36, 24, 18, 12, 9, 6 w/auto fallback

Radio Specifications—802.11b

- 2.4–2.5GHz Operating Frequency
- Direct-Sequence Spread-Spectrum (DSSS) Modulation
- Rates (Mbps): 11, 5.5, 2, 1 w/auto fallback

Radio Specifications—802.11g

- 2.4–2.5GHz Operating Frequency
- Orthogonal Frequency Division Multiplexing (OFDM) Modulation
- Rates (Mbps): 54, 48, 36, 24, 18, 12, 9, 6 w/auto fallback

Radio Specifications—802.11n

- 2.4–2.5 GHz & 5.150–5.950 GHz Operating Frequency
- 802.11n Modulation
- Rates (Mbps): MCS0–MCS23 (6.5Mbps - 450Mbps)
- 3x3:3 Stream Multiple-In, Multiple-Out (MIMO) Radio
- HT20 and HT40 High-Throughput (HT) Support (for both 2.4 GHz and 5 GHz)
- A-MPDU and A-MSDU Frame Aggregation

Antennas

- 6xRP-SMA antenna connections for external antennas
- Articulated antennas available for ceiling or flexible mounting
- Non-articulated antennas available for wall mounting

Mounting

- Wall Mount – bracket included
- Ceiling Tile Clips 11/17" included, 9/16" sold as an accessory
- Suspend Mount sold as an accessory
- Plenum Mount sold as an accessory

Interfaces

- 2x autosensing 10/100/1000Base-T Ethernet Ports
- Link Aggregation supported via Ether channel (link aggregation at 10/100 only)
- 1x Serial RJ45 port (bits per second: 9600, data bits: 8, parity: none, stop bits: 1, flow control: none)
- USB 2.0 port (with power adapter only)
- 1x Reset Pinhole

Physical

- WxHxD: 8.5 x 1.25 x 8 in. (21.5 x 3.2 x 20.3 cm)
- 3lbs (1.36 kg)

Environmental

- Operating: -20 to +55°C, Storage: -40 to +80°C,
- Humidity: 95%

Environmental Compliance

- UL 2043

Power Options

- 802.3af and/or 802.3at Power over Ethernet (PoE) port
- 12V DC external power adapter (sold separately)

Power Specifications

- AC/DC power adapter:
 - Input: 100–240VAC
 - Output: 12V/2A
- PoE nominal input voltages: 48V, 0.35A, (802.3af) - 48V, 0.625A (802.3at)
- RJ-45 power in put pins: Wires 4,5,7,8 or 1,2,3,6
- 802.3af compliant with Cat-5 cable (14.5W max power draw)

Power & Sensitivity Table

Power shown is per transmit chain and is a maximum power that the radio is capable of, power limits will be limited by local radio regulations.

Rate	2.4GHz		5GHz	
	TX Power	RX Sensitivity	TX Power	RX Sensitivity
802.11b				
1 Mbps	23	-100		
11 Mbps	21	-92		
802.11g/a				
6 Mbps	23	-96	23	-95
54 Mbps	20	-81	20	-80
802.11n HT20				
MCS0	23	-96	23	-95
MCS7	20	-81	20	-80
MCS8	23	-94	22	-93
MCS15	20	-79	19	-78
MCS16	22	-93	21	-92
MCS23	19	-77	18	-73
802.11n HT40				
MCS0	22	-93	22	-92
MCS7	19	-78	18	-77
MCS8	22	-91	21	-90
MCS15	19	-74	18	-75
MCS16	21	-90	21	-89
MCS23	18	-73	18	-70

Features & Benefits

Flexible Hardware Platform

- Radios provide concurrent 802.11a/n & 802.11b/g/n connections without degradation in performance
- Automatic or dedicated mesh backup
- Dual Ethernet ports etherchannel or backup.
- Plenum Rated APs for indoor, office environments
- Supports 802.3af PoE or standard power adapter
- Hardware acceleration for IPsec services
- Extended Temperature Range
- USB interface for future 3G/4G services

Innovative Design

- Low profile design blends into an office environment
- Low-distraction indicator appear as gently glowing rather than bright blinking lights

Hardware Assisted Features

Security





- Trusted Platform Module (TPM)–Hardware-based key storage and encryption
- Wireless privacy & authentication Wi-Fi CERTIFIED™ WPA™ and WPA2™, 802.11i, WEP, 802.1x, PSK
- Granular user profile-based management defines QoS, mobility policies, and security policies for each user that enters the network
- Encryption: AES:CCMP, TKIP, and RC4 (WEP only)

Anti-theft

- Designed to work with Kensington-style locks
- Tamper-proof security screw (with bracket option)

Hardware QoS Features

- Marking and policing–WMM™ (802.11e) for wireless, 802.1p and/or DiffServ
- Wi-Fi CERTIFIED WMM, WMM power save (U-APSD)

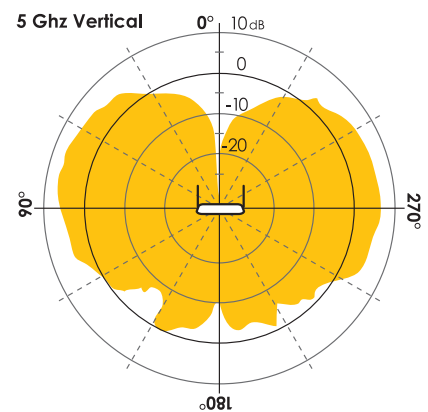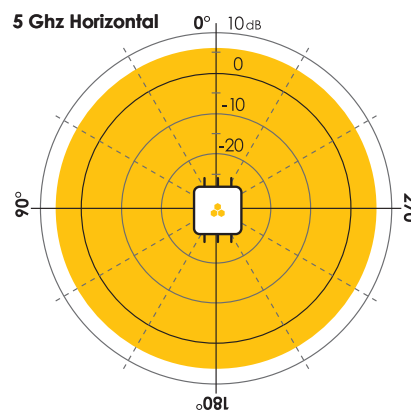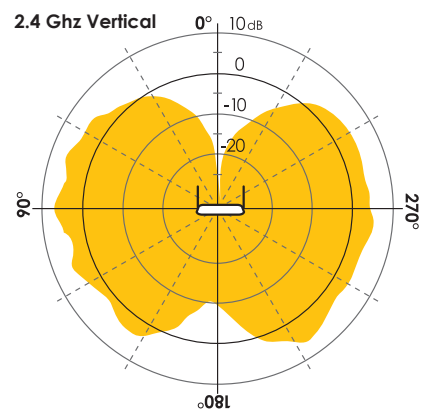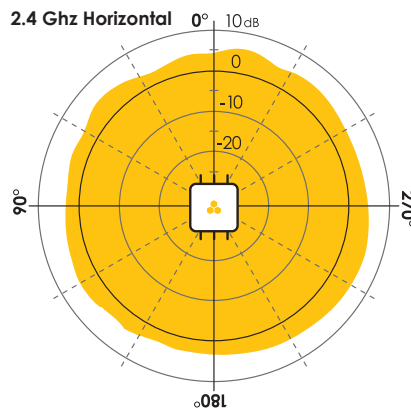

SKU	Description
Aerohive APs	
AH-AP-350-N-FCC	Aerohive AP350, Plenum Rated, one 802.11b/g/n radio, one 802.11a/n radio, two 10/100/1000 Ethernet (PoE), mounting bracket, FCC regulatory domain without power supply
AH-AP-350-N-W	Aerohive AP350, Plenum Rated, one 802.11b/g/n radio, one 802.11a/n radio, two 10/100/1000 Ethernet (PoE), mounting bracket, configurable regulatory domain without power supply
AP Accessories	
AH-ACC-350-ANT-KIT	Aerohive AP350 articulated indoor antenna kit (3x2.4Ghz 4dBi and 3x5Ghz 4dBi antennas)
AH-ACC-ANT-4-2G	RP-SMA female indoor 4dBi articulated antenna for AP 350
AH-ACC-ANT-4-5G	RP-SMA female indoor 4dBi articulated antenna for AP 350
AH-ACC-350-ANT-NART-KIT	AP350 non-articulated indoor wall antenna kit (3x2.4Ghz 2dBi and 3x5Ghz 2dBi antennas)
AH-ACC-350-ANT-NART-2G	2.4Ghz RP-SMA female indoor 2dBi non-articulated antenna for wall-mount deployment for AP350
AH-ACC-350-ANT-NART-5G	5Ghz RP-SMA female indoor 2dBi non-articulated antenna for wall-mount deployment for AP350
AH-ACC-PWR-24W-XX	24W power supply for AP330 and 350 with US, EU, UK, AU power plug
AH-ACC-350-ANT-75	5ghz RP-SMA female indoor 7.5dBi direction antenna for AP350
AH-ACC-INJ-30W-XX	30W Indoor Rated PoE Power Injector with US, EU, UK, AU power cord
AH-ACC-SEC-BIT-300-100-3PK	AP100 and AP300 series security screw bit (3pk)
AH-ACC-BKT-300-100	AP100 and AP300 series wall mounting bracket
AH-ACC-9-16-CLIP-300-100	AP100 and AP300 series 9/16" ceiling mount brackets for recessed and non-recessed ceiling tiles
AH-ACC-15-16-CLIP-300-100	AP100 and AP300 series 15/16" ceiling mount brackets for recessed and non-recessed ceiling tiles
AH-ACC-SERIAL-RJ45	RJ45 to DB9 Serial Console Cable